

■ **Solderless terminals, copper, 0.5 - 16 mm²**
Fork type

■ **For direct screw-mounting**


- Dimensions in tube up to 6 mm² according to DIN 46234
- Hard-soldered in the crimping area
- With grooved profile

Material

- Cu-ETP

Surface


- tin plated



Cross-section mm ²	Nominal size to DIN	Part No.	Dimensions mm						Weight/100 pcs. ~ kg	pcs.
			d1	d2	b	l	a	s		
0.5 - 1	3 - 1	1620C3	1.6	3.2	6.0	11.0	5.0	0.8	0.060	100
	3.5 - 1	1620C35	1.6	3.7	6.0	11.0	5.0	0.8	0.060	100
	4 - 1	1620C4	1.6	4.3	6.8	12.0	5.0	0.8	0.070	100
	5 - 1	1620C5	1.6	5.3	10.0	13.0	5.0	0.8	0.090	100
	6 - 1	1620C6	1.6	6.5	11.0	15.0	5.0	0.8	0.080	100
1.5 - 2.5	3 - 2.5	1630C3	2.3	3.2	5.5	13.8	5.0	0.8	0.065	100
	3.5 - 2.5	1630C35	2.3	3.7	6.0	11.0	5.0	0.8	0.065	100
	4 - 2.5	1630C4	2.3	4.3	6.8	12.0	5.0	0.8	0.080	100
	5 - 2.5	1630C5	2.3	5.3	10.0	14.0	5.0	0.8	0.090	100
	6 - 2.5	1630C6	2.3	6.5	11.0	16.0	5.0	0.8	0.110	100
4 - 6	4 - 6	1650C4	3.6	4.3	8.0	14.0	6.0	1.0	0.140	100
	5 - 6	1650C5	3.6	5.3	10.0	15.0	6.0	1.0	0.160	100
	6 - 6	1650C6	3.6	6.5	11.0	16.0	6.0	1.0	0.170	100
	8 - 6	1650C8	3.6	8.4	14.0	19.0	6.0	1.0	0.220	100
	10 - 6	1650C10	3.6	10.5	18.0	21.0	6.0	1.0	0.280	100
10	5 - 10	1652C5	4.3	5.3	10.0	19.0	10.0	1.0	0.240	100
	6 - 10	1652C6	4.3	6.4	11.0	21.0	10.0	1.0	0.260	100
16	6 - 16	1653C6	5.4	6.4	11.0	24.0	11.5	1.0	0.350	100
	8 - 16	1653C8	5.4	8.4	15.0	27.0	11.5	1.0	0.420	100

► Tool: see chart page 87

■ **Pin terminals lugs according to DIN, copper, 0.5 - 95 mm²**



■ For conductors e.g. VDE 0295 Class 2

Characteristics

- Manufactured according to DIN 46230
- Hard-soldered in the crimping area

Material


- Cu-ETP

Surface

- tin plated

Order info

- * = Not standardised

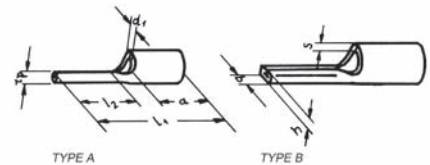

Cross-section mm ²	Nominal size to DIN	Part No.	Type	Dimensions mm								Weight/100 pcs. ~ kg	pcs.
				d1	d2	b	h	l1	l2	a	s		
0.5 - 1	1	ST1705	A	1.8	1,9	--	--	17.0	10	5.0	0.8	0.060	100
1.5 - 2.5	2.5	ST1710	A	2.3	1,9	--	--	17.0	10	5.0	0.8	0.072	100
4 - 6	6	ST1715	A	3.6	2,7	--	--	20.0	11	6.0	1.0	0.160	100
10	--	*ST1716	B	4.3	--	4,3	2,0	24.5	11	10.0	1.0	0.270	100
16	--	*ST1717	B	5.4	--	5,8	2,0	29.5	15	11.5	1.0	0.390	100
25	--	*ST1718	B	6.7	--	6,8	2,4	33.5	15	13.5	1.2	0.630	100
35	--	*ST1719	B	8.2	--	8,0	3,2	40.5	20	16.0	1.5	1.170	50
50	--	*ST1720	B	9.5	--	9,5	3,6	45.0	20	19.0	1.8	1.790	50
70	--	*ST1721	B	11.2	--	11,0	4,0	55.0	23	24.0	2.0	2.920	50
95	--	*ST1722	B	13.5	--	12,5	5,0	55.0	23	24.0	2.5	4.300	50

► Tool: see chart page 87