

■ **K 502**

Hydraulic cutting tool with foot pump max. Ø 50 mm

- Cuts copper and aluminium cables
- Foot pump with two-stage hydraulics

**Characteristics**


- Cutting head with quick coupling, rotates 360°
- High-pressure hose, 2 m
- Manual retraction in case of need, even at high pressure



Technical Data	
Cutting range:	max. cable size = Ø 50 mm
Operating pressure:	max. 700 bar
Weight:	21.6 kg

Item	Part No.	
Hydraulic cutting tool with foot pump max. Ø 50 mm	<b>K502</b>	
Scope of supply	Part No.	Page
High-pressure hose, 2m	HS22	375
Foot pump 700 bar	FHP2	409
Hydraulic cutting head max. Ø 50 mm	SDK502	403
Steel carrying case	MKU	231

Accessories	Part No.	Page
Hydraulic cutting head max. Ø 50 mm	SDK502	403
Foot pump 700 bar	FHP2	409
High-pressure hose, 2m	HS22	375
High-pressure hose, 3m	HS23	375
High-pressure hose, 4m	HS24	375
High-pressure hose, 5m	HS25	375
High-pressure hose, 6m	HS26	375
High-pressure hose, 8m	HS28	375
High-pressure hose, 10m	HS210	375
Digital meter for force and pressure measurement	TC1S	425
Pressure sensor 1000 bar	TP1000	425

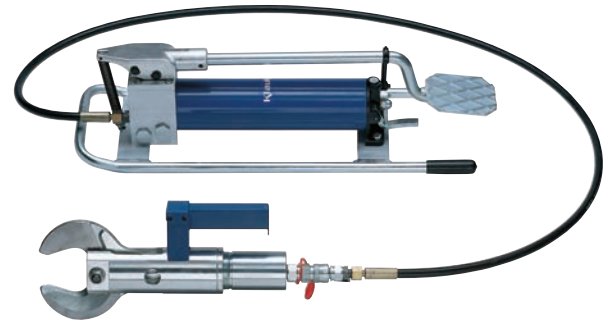


### ■ K 202

Hydraulic cutting tools with foot pump

- Cuts copper and aluminium cables
- Foot pump with two-stage hydraulics

#### Characteristics

- Cutting head with quick coupling, rotates 360°
- Manual retraction in case of need even at high pressure
- High-pressure hose, 2 m

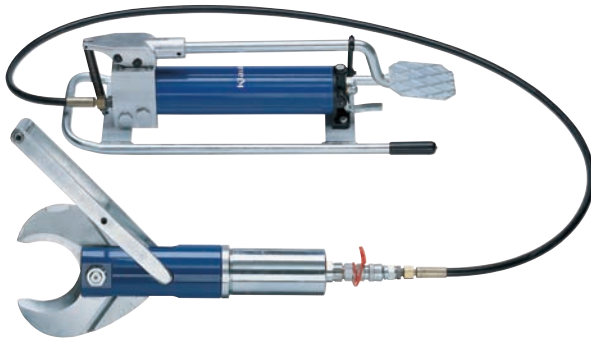

Technical Data		
	K 202/1	K 202/2
Cutting range:	max. cable size = Ø 90 mm	max. cable size = Ø 120 mm
Operating pressure:	max. 700 bar	max. 700 bar
Weight:	29.5 kg	32.0 kg

Item	Part No.	
Hydraulic cutting tool with foot pump max. Ø 90 mm	<b>K2021</b>	
Hydraulic cutting tool with foot pump max. Ø 120 mm	<b>K2022</b>	
Scope of supply	Part No.	Page
Foot pump 700 bar	FHP2	409
High-pressure hose, 2m	HS22	375
Steel carrying case	MKU	231

Accessories	Part No.	Page
Hydraulic cutting head max. Ø 90 mm	SDK2021	404
Hydraulic cutting head max. Ø 120 mm	SDK2022	404
Foot pump 700 bar	FHP2	409
High-pressure hose, 2m	HS22	375
High-pressure hose, 3m	HS23	375
High-pressure hose, 4m	HS24	375
High-pressure hose, 5m	HS25	375
High-pressure hose, 6m	HS26	375
High-pressure hose, 8m	HS28	375
High-pressure hose, 10m	HS210	375
Digital meter for force and pressure measurement	TC1S	425
Pressure sensor 1000 bar	TP1000	425

**■ K 303**

Hydraulic cutting tools with electro hydraulic drive unit

- To cut copper and aluminium cables
- Wide cutting range from Ø 90 mm or Ø 120 mm
- For portable use

**Characteristics**

- Cable cutter closes and opens hydraulically
- Available either with 3-phase motor or with AC motor
- High-pressure hoses, 2m
- Mains cord, 10 m
- Electronic control



Technical Data				
	K 303/1-380	K 303/1-220	K 303/2-380	K 303/2-220
Version:	3-phase motor, 400 V	AC motor 230 V	3-phase motor 400 V	AC motor 230 V
Rated output:	0.75 kW	0.75 kW	0.75 kW	0.75 kW
Motor voltage:	360 V - 440 V / 50 Hz	230 V / 50 Hz	360 V - 440 V / 50 Hz	230 V / 50 Hz
Capacity:	1.5 l/min	0.9 l/min	1.5 l/min	0.9 l/min
Cutting range:	max. cable size = Ø 90 mm (depending on cable type)	max. cable size = Ø 90 mm (depending on cable type)	max. cable size = Ø 120 mm (depending on cable type)	max. cable size = Ø 120 mm (depending on cable type)
Operating pressure:	max. 700 bar	max. 700 bar	max. 700 bar	max. 700 bar
Weight:	54.0 kg	54.0 kg	58.2 kg	57.0 kg

Item	Part No.	
Hydraulic cutting tool with electric hydraulic unit to max. Ø 90 mm, 400 V mains voltage	<b>K3031380</b>	
Hydraulic cutting tool with electric hydraulic unit to max. Ø 90 mm, 230 V mains voltage	<b>K3031220</b>	
Hydraulic cutting tool with electric hydraulic unit to max. Ø 120 mm, 400 V	<b>K3032380</b>	
Hydraulic cutting tool with electric hydraulic unit to max. Ø 120 mm, 230 V mains voltage	<b>K3032220</b>	
Scope of supply	Part No.	Page
High-pressure hose, 2m	HS22	375
Transport trolley	TW50	377

Accessories	Part No.	Page
Transport trolley	TW50	377
High-pressure hose, 2m	HS22	375
High-pressure hose, 3m	HS23	375
High-pressure hose, 4m	HS24	375
High-pressure hose, 5m	HS25	375
High-pressure hose, 6m	HS26	375
High-pressure hose, 8m	HS28	375
High-pressure hose, 10m	HS210	375
Digital meter for force and pressure measurement	TC1S	425
Pressure sensor 1000 bar	TP1000	425



**K 404**

Hydraulic cutting tools with petrol engine

- hydraulic pump with petrol engine
- Wide cutting range from Ø 90 mm or Ø 120 mm
- For portable use

**Characteristics**

- Cable cutter closes and opens hydraulically
- High-pressure hoses, 2 m
- Electronic control



Technical Data		
	<b>K 404/1</b>	<b>K 404/2</b>
Version:	1 cyl. 4-stroke engine, 3 kW	1 cyl. 4-stroke engine, 3 kW
Capacity:	1.5 l/min	1.5 l/min
Cutting range:	max. cable size = Ø 90 mm	max. cable size = Ø 120 mm
Operating pressure:	max. 700 bar	max. 700 bar
Weight:	64.0 kg	64.0 kg

Item	Part No.	
Hydraulic cutting tool with electro hydraulic drive unit max. Ø 90 mm	<b>K4041</b>	
Hydraulic cutting tool with electro hydraulic drive unit max. Ø 120 mm	<b>K4042</b>	
Scope of supply	Part No.	Page
Transport trolley	TW50	377
High-pressure hose, 2m	HS22	375

Accessories	Part No.	Page
Transport trolley	TW50	377
High-pressure hose, 2m	HS22	375
High-pressure hose, 3m	HS23	375
High-pressure hose, 4m	HS24	375
High-pressure hose, 5m	HS25	375
High-pressure hose, 6m	HS26	375
High-pressure hose, 8m	HS28	375
High-pressure hose, 10m	HS210	375
Digital meter for force and pressure measurement	TC1S	425
Pressure sensor 1000 bar	TP1000	425